37MM STINGER[®] 60-CAL RUBBER BALL BLACK POWDER ROUND



| PRODUCT SPECIFICATIONS | | | |
|------------------------------|---------------------------|----------------------------------|--|
| Diameter | 1.50 in / 37 mm | 1.50 in / 37 mm | |
| Length | 5.50 in / 14 cm | 8.00 in / 20.3 cm | |
| Projectile Count | 27 | 42 | |
| Velocity | 250 fps / 76 mps | 250 fps / 76 mps | |
| Minimum Safe Range | 15 ft / 4.6 m | 15 ft / 4.6 m | |
| Maximum Effective Range | 50 ft / 15.2 m | 50 ft / 15.2 m | |
| PROJECTILE SPECIFICATIONS | | | |
| Caliber | 60 | 60 | |
| Diameter | 0.60 in / 1.5 cm | 0.60 in / 1.5 cm | |
| Material | Rubber | Rubber | |
| Hardness | 60 Durometer (A) | 60 Durometer (A) | |
| Weight | 0.08 oz / 2.5 g | 0.08 oz / 2.5 g | |
| Part No. | 1198 | 1199 | |
| Warranty | 5 years from date of m | 5 years from date of manufacture | |
| ALL SPECIFICATIONS ARE AVERA | GES AND SUBJECT TO CHANGE | | |

ALL SPECIFICATIONS ARE AVERAGES AND SUBJECT TO CHANGE

The Stinger® 37mm, 60-Caliber Round is available in a 5.5-inch casing that contains approximately twenty-seven (27) rubber balls or an 8.0-inch casing that contains approximately forty-two (42) rubber balls and utilizes black powder as the propellant.

The Stinger® 37mm, 60-Caliber Round is most widely used as a crowd management tool by Law Enforcement and Corrections. The round is generally deployed in low trajectories or skip fired in the general direction (non-target **specific)** of the intended targets. It is suitable for administering a means of pain compliance over a greater distance than its counterpart, the Stinger® 32-Caliber Round. Like the Stinger® 32-Caliber Round, the Stinger® 37mm, 60-Caliber Round is not well suited as a dynamic, high-energy, single subject round for the purposes of incapacitation.


The Stinger® 37mm, 60-Caliber Round is intended to be skip or direct fired at the discretion of the operator, but it is necessary to keep the trajectory low so the projectile spread will not engage the subject above the breast line. When used in this manner, the operator should be adequately trained in the use of Less Lethal Impact Munitions and have a thorough understanding of the round and considerations of selecting shot placement such as level of threat, target distance, size, and clothing.

As a pain compliance round for crowd control, it is most suitable at close to moderate ranges of fire, approximately 15 to 40 feet. This round provides significantly more energy than its counterpart, the Stinger® 32-Caliber Round. It is ideal for lower threat levels such as a non-compliant crowd prior to the use of more dynamic munitions.

The Stinger® 37mm, 60-Caliber Round differs from its smokeless powder counterparts (37/40mm and 40mm, 60-Calibers) in that it may be acquired in an 8.0-inch casing that provides the greatest quantity of 60-Caliber rubber balls and that it utilizes black powder as the propellant. Black powder will usually disperse the rubber balls in wider patterns.



1855 South Loop Casper, WY 82601 www.defense-technology.com 800.347.1200 Safariland, LLC Rev. 06/20

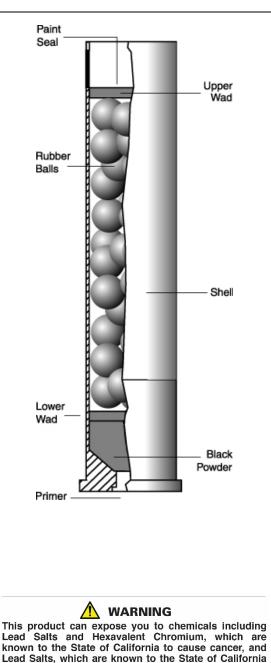

to cause birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.